

Effective and Reliable Performance




The new EXTR∆ 100 series is based upon the newly developed EXTR∆ cutterbar, which is designed for low maintenance and quiet operation. The fully welded cutterbar with overlapping c-profiles makes for a very stiff and strong construction with a high level of durability.

The EXTRA cutterbar has a high oil capacity, ensuring a very low working temperature and the long curved gear wheels run smoothly in oil and provide lots of power transmission with little slack.



Easy lift on headland.

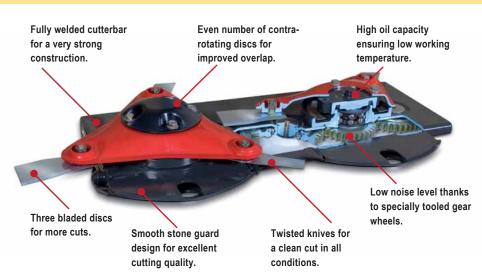

Transport Solution

When in transport, the mowers are folded to a vertical position well behind the tractor. The centre of gravity is close to the tractor, which ensures excellent weight distribution and transport stability.

Spring Loaded Break Back

If encountering an obstacle, the mower will swing backwards to protect the cutterbar. By reversing the mower is reset into working position.

Fast Lifting On Headland

The mower is easily lifted via a hydraulic cylinder without activating the tractors 3pt linkage. The advantage is less wear on tractor and machine, as the PTO stays in the same position, minimizing vibrations in the transmission.



Spring loaded break back.

Safe and narrow transport solution.



Adjustable bottom linkage pins.

Kverneland Group UK Ltd.Walkers Lane, Lea Green, St. Helens Merseyside, WA9 4AF Phone + 44 1744 8532 00

Technical Specifications

Туре	EXTR ∆ 117	EXTR ∆ 122	EXTR ∆ 124
Working Width (m/ft)	1.65 (5'5")	2.15 (7'1")	2.40 (7'10")
Weight appr. (kg/lbs)	390 (860)	455 (1003)	495 (1091)
Speed PTO (rpm)	540	540	540
Linkage Pins	Cat. I+II		
Number of Discs	4	6	6
Number of Blades	12	18	18
Operating Angle	90° vertical up to 45° slope		
Power Req. (kW/hp)	26 (36)	30 (42)	33 (46)
Swath Board R	•	•	•
Swath Board L	0	0	0
Swath Disc L/R	•	•	•
Skids for Height Adj.	0	0	0
• = Standard o = Optional			

Information provided in this brochure is made for general information purposes only and for worldwide circulation. Inaccuracies, errors or omissions may occur and the information may thus not constitute basis for any legal claim against Kverneland Group. Availability of models, specifications and optional equipment may differ from country to country. Please consult your local dealer. Kverneland Group reserves the right at any time to make changes to the design or specifications shown or described, to add or remove features, without any notice or obligations. Safety devices may have been removed from the machines for illustration purposes only, in order to better present functions of the machines. To avoid risk of injury, safety devices must never be removed. If removal of safety devices is necessary, e.g. for maintenance purpose, please contact proper assistance or supervision of a technical assistant. © Kverneland Group Kerteminde AS

