

Trinciatrici

Mulching Mowers
Broyeurs
Mulcher
Trituradoras



La Gamma

Disponibili per trattori da 15 a 220 cv

GB Available for tractors from 15 up to 220 cv

F Disponibles pour tracteurs de 15 à 220 cv

D Verfügbar für Traktoren von 15 bis 220 PS

E Disponibles para tractores de 15 a 220 hp

GB The range F La gamme D Die Auswahl E La gama

Giardinaggio

GB GARDENING F JARDINAGE D GARTEN MASCHINEN E JARDINERIA



JET 50 SR
(15-40 HP) cm 105 - 125 - 155



GREEN STORM
(20-40 HP) cm 120 - 150 - 180

Trinciatrici spostabili

GB SIDE SHIFT MULCHING MOWERS F BROYEURS DÉPORTABLES D MULCHER SEITLICHER VERSCHIEBUNG E TRITURADORAS DESPLAZABLES



TURBOT 100 - 110 SR
(40-90 HP) cm 155 - 180 - 200 - 220 - 250 - 280



TURBOT 120 SR
(65-120 HP) cm 180 - 200 - 220 - 250 - 280

Trinciatrici spostabili

GB SIDE SHIFT MULCHING MOWERS F BROYEURS DÉPORTABLES D MULCHER SEITLICHER VERSCHIEBUNG E TRITURADORAS DESPLAZABLES



FLASH 55 SR
(20-50 HP) cm 105 - 125 - 155 - 180 - 200



TURBOT 75 SR
(30-70 HP) cm 125 - 155 - 185 - 200 - 220

Trinciastocchi

GB STRAW CHOPPER F BROYEURS D HÄCKSLER E TRITURADORAS



HURRICANE H82
(55-70 HP) cm 160 - 200 - 230



HURRICANE H82 PLUS
(70-100 HP) cm 250 - 280 - 330

La Gamma

Disponibili per trattori da 15 a 220 cv

GB Available for tractors from 15 up to 220 cv

F Disponibles pour tracteurs de 15 à 220 cv

D Verfügbar für Traktoren von 15 bis 220 PS

E Disponibles para tractores de 15 a 220 hp

GB The range F La gamme D Die Auswahl E La gama

Trinciasocchi

GB STRAW CHOPPER F BROyeurs D HÄCKSLER E TRITURADORAS



HURRICANE H 92 DT
(80-120 HP) cm 320

DOPPIA TRASMISSIONE

GB Double transmission F Double entraînement
D Doppel antrieb E Doble transmisión

MONO ROTORE

GB One rotor F Mono rotor
D Ein rotor E Rotor individual



Trinciatrici laterali

GB LINE / OFFSET MULCHER F BROyeurs D'ACCOTEMENT D BÖSCHUNGSMULCHER E TRITURADORAS LATERALES



MINI MASTER
(25-40 HP) cm 120 - 155



MASTER
(40-90 HP) cm 160 - 180 - 200



HURRICANE H 182 FOLD
(140-220 HP) cm 475 - 600



HYPER MASTER
(80-120 HP) cm 180 - 200 - 220 - 250



SHIFT MASTER L
(25-45 HP) cm 120-140
SHIFT MASTER XL
(60-160 HP) cm 140 - 160 - 180 - 200 - 220 - 250

TRASMISSIONE LATERALE

GB SIDE TRANSMISSION F TRASMISSION LATÉRALE D SEITLICHES GETRIEBE E TRASMISSION LATERAL



JET 50 SR	N° 2	XPA 1000
FLASH 55 SR	N° 3	XPB 1180
TURBOT 75 SR (125-155)	N° 3	SPBX 1250
TURBOT 75 SR (185-220)	N° 4	SPBX 1250
TURBOT 100 - 110	N° 4	SPBX 1340
TURBOT 120 (180-200)	N° 4	SPBX 1600
TURBOT 120 (220-300)	N° 5	SPBX 1600
HURRICANE H 82	N° 4	SPBX 1600
HURRICANE H 82 PLUS	N° 5	SPBX 1600
HURRICANE H 92 DT	N° 3+3	SPB 1750
HURRICANE H 182 FOLD	N° 5+5	SPB 1750
MINI MASTER	N° 3	SPB 1250
MASTER - SUPER MASTER	N° 4	SPBX 1400
HYPER MASTER - HYPER MASTER XL	N° 4	SPBX 1510
SHIFT MASTER L	N° 3	XPB 1900
SHIFT MASTER XL	N° 4	XPB 2900

REGOLAZIONE CINGHIE DI TRASMISSIONE

GB BELT TRANSMISSION ADJUSTMENT F RÉGLAGE COURROIES DE TRANSMISSION D ANTRIEBSKEILRIEMEN E REGULACIÓN CORREAS DE TRANSMISSION



STANDARD:
JET 50 SR
FLASH 55 SR
HURRICANE H 82
HURRICANE H 82 PLUS



STANDARD:
JET 50 SR
FLASH 55 SR
TURBOT 75 SR
TURBOT 100 SR
TURBOT 110 SR
TURBOT 120 SR



STANDARD:
HURRICANE H 92 DT
HURRICANE H 182 FOLD



STANDARD:
MINI MASTER
MASTER
SUPER MASTER
HYPER MASTER
HYPER MASTER XL

SCATOLA INGRANAGGI

GB GEARBOX F BOÎTIER D GETRIEBE E CAJA ENGRANAJES



CON RUOTA LIBERA

GB WITH FREE WHEEL F AVEC ROUE LIBRE
D MIT FREILAUF E CON RUEDA LIBRE

STANDARD:

JET 50 SR
FLASH 55 SR
TURBOT 75 SR
TURBOT 100 SR
TURBOT 110 SR
TURBOT 120 SR
HURRICANE H 82
HURRICANE H 82 PLUS
MASTER (SUPER MASTER)
HYPER MASTER (XL)
SHIFT MASTER (L-XL)



SENZA RUOTA LIBERA

GB WITHOUT FREE WHEEL F SANS ROUE LIBRE
D OHNE FREILAUF E SIN RUEDA LIBRE

STANDARD:

HURRICANE H 92 DT
HURRICANE H 182 FOLD



PDF POSTERIORE

GB REAR PTO F PDF ARRIÈRE
D HINTER DURCHTRIEB E TDF POSTERIOR

STANDARD:

JET 50 SR
FLASH 55 SR
TURBOT 75 SR
TURBOT 100 SR
TURBOT 110 SR
TURBOT 120 SR

ROTORI

GB ROTORS F ROTORS D ROTOREN E ROTORES



JET 50 SR	Ø 102 X 6
FLASH 55 SR	Ø 140 X 10
TURBOT 75 SR	Ø 102 X 10
TURBOT 100	Ø 168 X 10
TURBOT 110	Ø 168 X 10
TURBOT 120 SR (180-250)	Ø 194 X 10
TURBOT 120 SR (280)	Ø 194 X 12,5
HURRICANE H 82	Ø 194 X 10
HURRICANE H 82 PLUS (250)	Ø 194 X 10
HURRICANE H 82 PLUS (280-330)	Ø 194 X 12,5
HURRICANE H 92 DT	Ø 219 X 16
HURRICANE H 182 FOLD	Ø 194 X 12,5
MINI MASTER (120)	Ø 89 X 6,3
MINI MASTER (150)	Ø 108 X 8
MASTER - SUPER MASTER	Ø 159 X 8
HYPER MASTER - HYPER MASTER XL	Ø 194 X 10
SHIFT MASTER L	Ø 108 X 6,3
SHIFT MASTER XL	Ø 159 X 10
SHIFT MASTER XL 250	Ø 159 X 12,5

SEZIONE TECNICA / TECHNICAL SECTION / SECTION TECHNIQUE / TECHNISCHE SEITE / SECCION TECNICA

MAZZE E COLTELLI

GB HAMMERS / BLADES F MARTEAUX / COUTEAUX D HAMMERSCHLEGEL / MESSER E MARTILLOS / CUCHILLAS

JET 50 SR



REF 30

FLASH 55 SR



REF 40 Kg 1.40



REF 50

TURBO T 75 SR



REF 40 Kg 1.40



REF 50

TURBO T 100 / 110



REF 40 Kg 1.40



REF 50

TURBO 120



REF 60 Kg 1.60



REF 50

HURRICANE H 82



REF 110



REF 100



REF 90 Kg 2.10



REF 80

HURRICANE H 82 PLUS



REF 110



REF 100



REF 90 Kg 2.10



REF 80

HURRICANE H 92 DT



REF 140



REF 150 Kg 1.60

HURRICANE 182 FOLD



REF 160



REF 170

MINI - MASTER



REF 180



REF 190

MASTER - SUPER MASTER



REF 40 Kg 1.40



REF 50

HYPER MASTER - HYPER MASTER XL



REF 120 Kg 1.80



REF 130

SHIFT MASTER L



REF 200 Kg 0.70



REF 220

SHIFT MASTER XL




REF 210 Kg 1.50




REF 230

CONTRO COLTELLO ANGOLARE A / DENTATO D

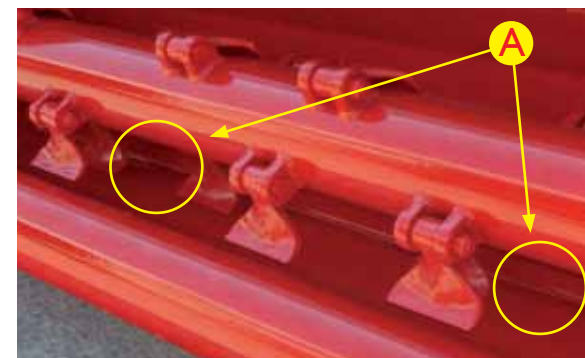GB CHOPPING ANGULAR A / TOOTHED D F CONTRE COUTEAU ANGULAIRE A / DENTÉ D
D GEGENMESSER WINCKLIG A / GEZHANT D E CONTRA CUCHILLA ANGULAR A / DENTADA D

STANDARD:

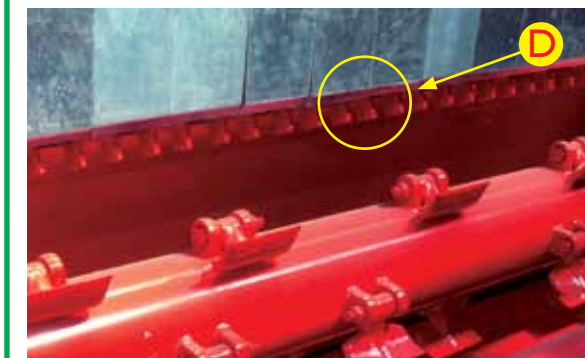JET 50 SR N° 1
FLASH 55 SR N° 2
TURBO T 75 SR N° 1
TURBO T 100 SR N° 2
TURBO T 110 SR N° 2
TURBO T 120 SR N° 2

STANDARD:

HURRICANE H 82 N° 1
HURRICANE H 82 PLUS N° 1
HURRICANE T 92 DT N° 1
MASTER - SUPER MASTER N° 2
HYPER MASTER XL N° 2

OPTION:

HURRICANE H 82 (2°)
HURRICANE H 82 PLUS (2°)
HURRICANE T 92 DT
HURRICANE H 182 FOLD


BANDELLE DI PROTEZIONE

GB FRONT PLATES PROTECTION F PROTECTIONS DE SÉCURITÉ
D SCHUTZVORRICHTUNG E PROTECCIONES

TUTTI I MODELLI

GB ALL THE MODELS F ALLE MODELLE
D MANCA TEDESCO E TODOS LOS MODELOS

DOPPIO TELAIO

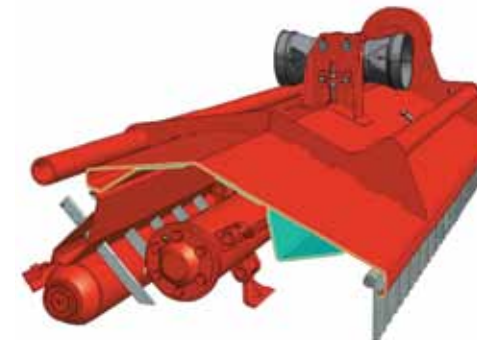GB DOUBLE FRAME F DOUBLE CHASSIS
D GESCHWEISST GEGENRAHMEN E DOUBLE BASTIDOR

STANDARD:

TURBO T 75 SR
TURBO T 100 / 110 SR
TURBO T 120
MASTER - SUPER MASTER
HYPER MASTER - XL

HURRICANE H 92 DT:

su questo modello viene saldata una piastra di rinforzo interna

GB IN THIS MODEL A REINFORCEMENT
PLATE IS INTERNALLY WELDED
F SUR CE MODÈLE IL Y A SOUDÉE UNE
PLAQUE DE RENFORCEMENT INTERNE
D AUF DIESEM MODEL IST EINE INNE
VERSTÄRKTE PLATTE GESCHWEISSE
E EN ESTE MODELO VEIN SOLDADO UNA
LÁMINA DE REFUERZO INTERNA

VALVOLA DI SICUREZZA

GB SAFETY VALVE F SOUPAPE DE SÉCURITÉ
D SICHERHEITVENTIL E VÁLVULA DE SEGURIDAD

STANDARD:

HURRICANE H 182 FOLD

GANCIO DI SICUREZZA

GB SAFETY HOOK F CROCHET DE SÉCURITÉ
D SICHERHEITSHAKEN E GANCHO DE SEGURIDAD

STANDARD:

HURRICANE H 182 FOLD

CARDANO

GB PTO SHAFT F CARDAN D GELENKWELLE E CARDAN



SENZA SICUREZZA
GB WITHOUT SAFETY DEVICE
F SANS SÉCURITÉ
D OHNE SICHERHEIT
E SIN SEGURIDAD

STANDARD:

JET 50 SR
FLASH 55 SR
TURBOT 75 SR
TURBOT 100 / 110 SR
TURBOT 120
HURRICANE H 82
HURRICANE H 82 PLUS
HURRICANE H 92 DT
HURRICANE H 182 FOLD
MINI MASTER
MASTER (SUPER MASTER)
HYPER MASTER (HYPER MASTER XL)
SHIFT MASTER (L - XL)



CON LIMITATORE A BULLONI
GB WITH SHEAR BOLT
F AVE LIMITEURS À BOULONS
D MIT SICHERSTIFT
E CON LIMITADOR DE PAR POR FUSIBLE

OPTION:

HURRICANE H 92 DT



DOPPIO OMOCINETICO
GB DOUBLE WIDE - ANGLE
F DOUBLE HOMOCINETIQUE
D DOPPEL WEITWINKEL
E DOBLE HOMOCINETICO

OPTION:

MASTER
SUPER MASTER
HYPER MASTER
HYPER MASTER XL

RULLI POSTERIORI

GB ROLLERS F ROULEAUX D WALZEN E RODILLOS



STANDARD:

JET 50 SR	Ø 102x4
FLASH 55 SR	Ø 102x4
TURBOT 75 SR	Ø 140x4
TURBOT 100 SR	Ø 168x6,3
TURBOT 110 SR	Ø 168x6,3
TURBOT 120 SR	Ø 168x6,3
HURRICANE 182 FOLD	Ø 194x10
MINI MASTER	Ø 120x4
MASTER SUPER	Ø 140x6,3
HYPER MASTER XL	Ø 168x6,3
SHIFT MASTER L	Ø 114x3,2
SHIFT MASTER XL	Ø 194x10

OPTION:

HURRICANE H 82	Ø 168x6,3
HURRICANE H 82	Ø 219x5
HURRICANE H 82 PLUS	Ø 219x5
HURRICANE H 92 DT	Ø 194x4,5

COFANO POSTERIORE

GB REAR HOOD F CAPOT ARRIERE D HINTERE HAUBE E TAPA TRASERA



CHIUSO
GB CLOSED
F FERMÉ
D GESCHLOSSEN
E CERRADO



PICCOLO APRIBILE
GB SMALL OPENED
F PETIT OUVERT
D KLEIN GEÖFFNET
E PEQUEÑO ABIERTO



GRANDE APRIBILE
GB BIG OPENED
F GRAN OUVERT
D GROß GEÖFFNET
E GRANDE ABIERTO

ALETTE SPARGITRICI

GB ORIENTABLE SPREADING FINS
F AILETTES DEFLECTEURS
D VERTEILERFLÜGEL
E AILETTAS



STANDARD:

HURRICANE H 82
HURRICANE H 82 PLUS
HURRICANE H 92 DT
HURRICANE H 182 FOLD

SPOSTAMENTO IDRAULICO

GB HYDRAULIC SIDE SHIFT
F DÉPORT HYDRAULIQUE
D HYDR. SEITENVERSCHIEBUNG
E DESPLAZAMIENTO HIDRAULICO



STANDARD:

TURBOT 75 SR
TURBOT 100 SR
TURBOT 110 SR
TURBOT 120 SR

OPTION:
FLASH 55 SR

SPOSTAMENTO MECCANICO

GB MECHANICAL SIDE SHIFT
F DÉPORTE MÉCANIQUE
D MECHANISCHE SEITENVERSCHIEBUNG
E DESPLAZAMIENTO MECANICO



STANDARD:

JET 50 SR
FLASH 55 SR

3° PUNTO CON DUE POSIZIONI DI FISSAGGIO

GB TWO HITCH POSITIONS
F DEUX POSITIONS D'ATTELLAGE
D ZWEI ANBAU POSITIONEN
E DOS POSICIONES ENGANCHE 3 PUNTO



STANDARD:

HURRICANE H 82

SLITTE LATERALI

GB SKIDS
F PATINS
D KUFEN
E PATINES



STANDARD:

JET 50 SR

OPTION:
MINI MASTER

SLITTE LATERALI

GB SKIDS
F PATINS
D KUFEN
E PATINES



STANDARD:

FLASH 55 SR
TURBOT 100 SR
TURBOT 110 SR
TURBOT 120 SR

OPTION:

MASTER
SUPER MASTER

ACCESSORI EQUIPMENTS / ACCESSOIRES / ZUBEHÖREN / EQUIPOS

SLITTE LATERALI

GB SKIDS F PATINS D KUFEN E PATINES

OPTION:
HURRICANE H 82
HURRICANE H 82 PLUSOPTION:
HURRICANE H 92 DTSTANDARD:
HURRICANE
H 182 FOLD
SHIFT MASTER L
SHIFT MASTER XL

RUOTE POSTERIORI

GB WHEELS F ROUES D RÄDER E RUEDAS

OPTION:
HURRICANE H 82 (145 / 55 R13)
HURRICANE H 82 PLUS 250 (145 / 55 R13)
HURRICANE H 82 PLUS 280 - 330 (195 / 65 R15)OPTION:
HURRICANE H 92 DT (205 / 60 R15)
HURRICANE H 182 FOLD (205 / 60 R15)OPTION:
HURRICANE H 82 (195 / 65 R15)
HURRICANE H 82 PLUS (195 / 65 R15)


ASTE DI RACCOLTA

GB RAKES
F TIGES DE RÉCOLTE
D RECHEN
E RASTRILLOSOPTION:
FLASH 55 SR
TURBOT 75 SR
TURBOT 100 SR
TURBOT 110 SR
TURBOT 120 SRBARRA
LUCI POSTERIOREGB REAR LIGHTS
F DISPOSITIF D'ÉCLAIRAGE
D BELEUCHTUNG
E DISPOSITIVO DE ALUMBRADOSTANDARD:
HURRICANE H 182 FOLDPANNELLI
RETRORIFLETTENTIGB BACK REFLEX PANELS
F PANNEAUX DE SIGNALISATION
D ERKEMMUNGSTAFEL
E PANELO RETROREFLEJANTESOPTION:
HURRICANE H 182 FOLD


SPOSTAMENTO IDRAULICO E MECCANICO

HYDRAULIC SIDE SHIFT / DÉPORT HYDRAULIQUE / HYDRAULISCHEMSEITENVERSETZUNG / DESPLAZAMIENTO HIDRAULICO

●MINI MASTER ●MASTER ●SUPER MASTER ●HYPER MASTER ●HYPER MASTER XL ●SHIFT MASTER L ●SHIFT MASTER XL

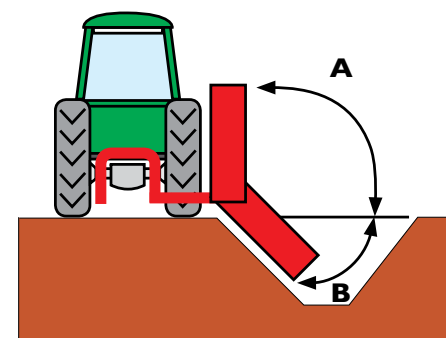


MODEL	A	B
MINI MASTER	90°	65°
MASTER	90°	60°
SUPER MASTER	90°	60°
HYPER MASTER	90°	60°
HYPER MASTER XL	90°	60°
SHIFT MASTER L	90°	65°
SHIFT MASTER XL	90°	65°

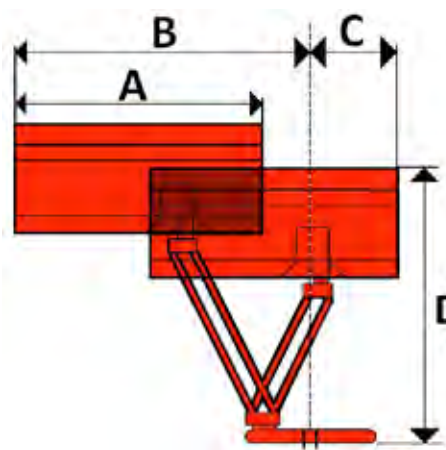

MODEL	A	B	C	D
MINI MASTER 120	cm 120	cm 220	cm 25	cm 130
MINI MASTER 150	cm 145	cm 265	cm 35	cm 140
MASTER 160	cm 162	cm 272	cm 58	cm 184
MASTER 180	cm 181	cm 291	cm 58	cm 184
MASTER 200	cm 200	cm 310	cm 58	cm 184
SUPER MASTER 160	cm 162	cm 310	cm 20	cm 184
SUPER MASTER 180	cm 181	cm 329	cm 20	cm 184
SUPER MASTER 200	cm 200	cm 348	cm 20	cm 184
HYPER MASTER 180	cm 182	cm 255	cm 60	cm 185
HYPER MASTER 200	cm 200	cm 273	cm 60	cm 185
HYPER MASTER 220	cm 219	cm 292	cm 60	cm 185
HYPER MASTER 250	cm 249	cm 322	cm 60	cm 185
HYPER MASTER XL 180	cm 182	cm 306	cm 60	cm 185
HYPER MASTER XL 200	cm 200	cm 324	cm 60	cm 185
HYPER MASTER XL 220	cm 219	cm 343	cm 60	cm 185
HYPER MASTER XL 250	cm 249	cm 373	cm 60	cm 185



MODEL	
SHIFT MASTER L 80	cm 35
SHIFT MASTER L 100	cm 35
SHIFT MASTER L 120	cm 35
SHIFT MASTER L 140	cm 35
SHIFT MASTER XL 140	cm 55
SHIFT MASTER XL 160	cm 55
SHIFT MASTER XL 180	cm 55
SHIFT MASTER XL 200	cm 55
SHIFT MASTER XL 220	cm 55
SHIFT MASTER XL 250	cm 55

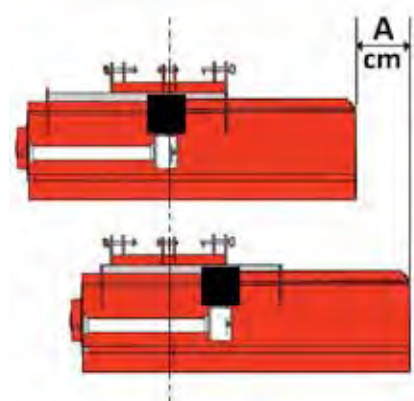

MODEL	A
JET 50 SR	cm 15
FLASH 55 SR 105 / 125	cm 30
FLASH 55 SR 155 / 180 / 200	cm 40
TURBOT 75 125	cm 30
TURBOT 75 135 / 180 / 200 / 220	cm 40
TURBOT 100	cm 40
TURBOT 110	cm 40
TURBOT 120	cm 40



REGOLAZIONE CINGHIE DI TRASMISSIONE



- GB BELT TRANSMISSION ADJUSTMENT
- F RÉGLAGE TRANSMISSION DE COURROIES
- D ANTRIEBSKEILRIEMEN
- E REGULACIÓN CORREAS DE TRANSMISIÓN

RUOTE REGISTRABILI PER REGOLAZIONE ALTEZZA TAGLIO



- GB PIVOTING WHEELS WITH HEIGHT ADJUSTMENT CONTROL
- F ROUES PIVOTANTES ET RÉGLABLES EN HAUTEUR
- D RÄDER FÜR SCHNITTHÖHEINSTELLUNG
- E RUEDAS PIVOTANTES Y AJUSTABLES EN ALTURA

SCARICO LATERALE



- GB SIDE OR REAR DISCHARGE
- F EJECTION LAT. OU ARRIERE
- D HINTERER AUSWURF
- E DESCARGUE LATERAL O TRASERO

KIT MULCHING



MOD.						
	HP	RPM	A: cm B: cm	KG	N.	CM
GREEN STORM 120	20 - 30	540	120 130	180	3	2 - 7
GREEN STORM 150	25 - 35	540	150 160	200	3	2 - 7
GREEN STORM 180	35 - 40	540	180 190	230	3	2 - 7

MOD.									
JET 50 SR	RPM	HP	Cm. A - B	Kg.	N.	N.	N.	N.	Cm.
105	540	15 - 25	100 - 120	160	60	-	-	-	2 - 6
125	540	20 - 35	117 - 140	180	72	-	-	-	2 - 6
155	540	30 - 40	146 - 170	200	90	-	-	-	2 - 6

MOD.									
FLASH 55 SR	RPM	HP	Cm. A - B	Kg.	N.	N.	N.	N.	Cm.
105	540	20 - 30	105 - 120	260	10	30	-	-	2 - 5
125	540	25 - 35	125 - 140	285	12	36	-	-	2 - 5
155	540	25 - 40	155 - 170	320	16	48	-	-	2 - 5
180	540	30 - 45	180 - 195	355	18	54	-	-	2 - 5
200	540	35 - 50	200 - 215	390	20	60	-	-	2 - 5

MOD.									
TURBO T 75 SR	RPM	HP	Cm. A - B	Kg.	N.	N.	N.	N.	Cm.
125	540/1000	30 - 50	125 - 140	470	12	36	-	-	2 - 7
155	540/1000	35 - 55	155 - 170	495	16	48	-	-	2 - 7
185	540/1000	40 - 60	185 - 200	530	18	54	-	-	2 - 7
200	540/1000	45 - 65	200 - 215	575	20	60	-	-	2 - 7
220	540/1000	50 - 70	220 - 235	620	22	66	-	-	2 - 7

MOD.									
TURBO T 100 SR	RPM	HP	Cm. A - B	Kg.	N.	N.	N.	N.	Cm.
155	540/1000	40 - 60	155 - 175	690	16	48	-	-	2 - 7
180	540/1000	45 - 65	180 - 195	750	18	54	-	-	2 - 7
200	540/1000	45 - 70	200 - 220	790	20	60	-	-	2 - 7
220	540/1000	50 - 75	220 - 240	840	22	66	-	-	2 - 7

MOD.									
TURBO T 110 SR	RPM	HP	Cm. A - B	Kg.	N.	N.	N.	N.	Cm.
250	540/1000	55 - 80	250 - 270	910	26	78	-	-	2 - 7
280	540/1000	60 - 90	280 - 300	980	28	84	-	-	2 - 7

MOD.									
TURBO T 120 SR	RPM	HP	Cm. A - B	Kg.	N.	N.	N.	N.	Cm.
180	540/1000	65 - 80	182 - 199	800	16	48	-	-	2 - 7
200	540/1000	75 - 90	200 - 217	850	18	54	-	-	2 - 7
220	540/1000	80 - 95	219 - 236	900	20	60	-	-	2 - 7
250	540/1000	95 - 110	249 - 276	970	26	78	-	-	2 - 7
280	540/1000	100 - 120	277 - 294	1080	28	84	-	-	2 - 7

MOD.									
HURRICANE H 82	RPM	HP	Cm. A - B	Kg.	N.	N.	N.	N.	Cm.
160	540/1000	55 - 60	163 - 180	640	32	48	16	32	2 - 7
200	540/1000	60 - 65	200 - 217	680	40	60	20	40	2 - 7
230	540/1000	65 - 70	232 - 249	700	48	72	24	48	2 - 7

MOD.									
HURRICANE H 82 PLUS	RPM	HP	Cm. A - B	Kg.	N.	N.	N.	N.	Cm.
250	540/1000	70 - 80	252 - 279	750	48	72	24	48	2 - 7
280	540/1000	80 - 90	276 - 293	820	56	84	28	56	2 - 7
330	540/1000	90 - 100	332 - 349	950	68	102	34	68	2 - 7

MOD.									
HURRICANE H 92 DT	RPM	HP	Cm. A - B	Kg.	N.	N.	N.	N.	Cm.
320	540	90 - 100	320 - 370	1200	72	36	-	-	2 - 7

MOD.									
HURRICANE H 182 FOLD	RPM	HP	Cm. A - B	Kg.	N.	N.	N.	N.	Cm.
475	1000	140 - 180	475 - 525	2250	96	48	-	-	2 - 7
600	1000	150 - 220	600 - 650	2800	128	64	-	-	2 - 7

Dati Tecnici

TECHNICAL DATA / DONNÉES TECHNIQUES / TECHNISCHE DATEN / DATOS TECNICOS

MOD.									
MINI MASTER	RPM	HP		Kg.	N.	N.	N.	N.	Cm.
120	540	Min. 25	120 - 135	196	48	-	-	-	2 - 5
150	540	Min. 25	145 - 160	244	56	-	-	-	2 - 5

MOD.									
MASTER	RPM	HP		Kg.	N.	N.	N.	N.	Cm.
160	540	40 - 70	160 - 175	550	14	42	-	-	2 - 7
180	540	50 - 80	180 - 195	580	16	48	-	-	2 - 7
200	540	60 - 90	200 - 215	610	18	54	-	-	2 - 7

MOD.									
SUPER MASTER	RPM	HP		Kg.	N.	N.	N.	N.	Cm.
160	540	40 - 70	160 - 175	590	14	42	-	-	2 - 7
180	540	50 - 80	180 - 195	620	16	48	-	-	2 - 7
200	540	60 - 90	200 - 215	650	18	54	-	-	2 - 7

MOD.									
HYPER MASTER	RPM	HP		Kg.	N.	N.	N.	N.	Cm.
180	540	80 - 90	182 - 202	810	16	48	-	-	2 - 7
200	540	80 - 100	200 - 220	850	18	54	-	-	2 - 7
220	540	90 - 110	219 - 239	890	20	60	-	-	2 - 7
250	540	90 - 120	249 - 269	955	22	66	-	-	2 - 7

MOD.									
HYPER MASTER XL	RPM	HP		Kg.	N.	N.	N.	N.	Cm.
180	540	80 - 90	182 - 202	830	16	48	-	-	2 - 7
200	540	80 - 100	200 - 220	870	18	54	-	-	2 - 7
220	540	90 - 110	219 - 239	910	20	60	-	-	2 - 7
250	540	90 - 120	249 - 269	975	22	66	-	-	2 - 7

MOD.									
SHIFT MASTER L	RPM	HP	Cm. A	Kg.	N.	N.	N.	N.	Cm.
120	540/1000	35 - 40	120	320	40	20	-	-	2 - 7
150	540/1000	40 - 45	140	340	48	24	-	-	2 - 7

MOD.									
SHIFT MASTER XL	RPM	HP	Cm. A	Kg.	N.	N.	N.	N.	Cm.
140	540/1000	60 - 70	140	780	24	12	-	-	2 - 7
160	540/1000	70 - 80	160	830	28	14	-	-	2 - 7
180	540/1000	85 - 90	180	880	28	14	-	-	2 - 7
200	540/1000	90 - 100	200	930	32	16	-	-	2 - 7
220	540/1000	100 - 120	220	980	36	18	-	-	2 - 7
250	540/1000	120 - 160	250	1050	44	22	-	-	2 - 7

